



'Excellence in **Energy Services** for over 100 years'

Casper, WY (307) 265-6550  
 Conroe, TX (936) 539-5545  
 Latrobe, PA (724) 424-9714  
 Oklahoma City, OK (405) 631-1222

Denver, CO (303) 228-9406  
 Odessa, TX (432) 257-7545  
 Williston, ND (701) 572-9942  
 Nisku, AB Canada (780) 979-6799



# Mud Motor Specification Sheet

## 5" 7/8 4.5 (.46) 5" OD, 7/8 Lobe, 4.5 Stages

### Physical Data

Bit size range	Bit box connection	Top sub connection	Maximum weight on bit	Maximum overpull
5 7/8" - 6 3/4"	3 1/2" Reg	3 1/2" IF Box	30,500 lbs.	90,000 lbs.

### Recommended Drilling Fluid Properties


Sand content (Maximum)	Low gravity solids (LGS) (Maximum)	Total solids (Maximum)	pH	Aniline point (OBM) (Minimum)	Chlorides (Maximum)	Lost circulation material (LCM)
Trace	4%	8%	8 to 10	165° F	150,000 ppm	Thoroughly mix before pumping downhole

### Performance Specifications

	Rev / Gal	Flow range	Speed range	Max operating diff pressure	Torque at max operating diff pressure	Stall diff pressure	Torque at stall pressure	Max temp for max operating diff pressure
NBR	0.46	163 - 325 GPM	75 - 150RPM	675 psi	3,503 ft. lbs	1,013 psi	5,255 ft. lbs	150° F*
HR	0.46	163 - 325 GPM	75 - 150 RPM	1,013 psi	5,255 ft. lbs	1,519 psi	7,882 ft. lbs	150° F*

\* For temperatures exceeding 150° F, please refer to Hunting's derating of differential pressure due to downhole temperature.

- HR Elastomer •
- NBR Elastomer •
- Torque •

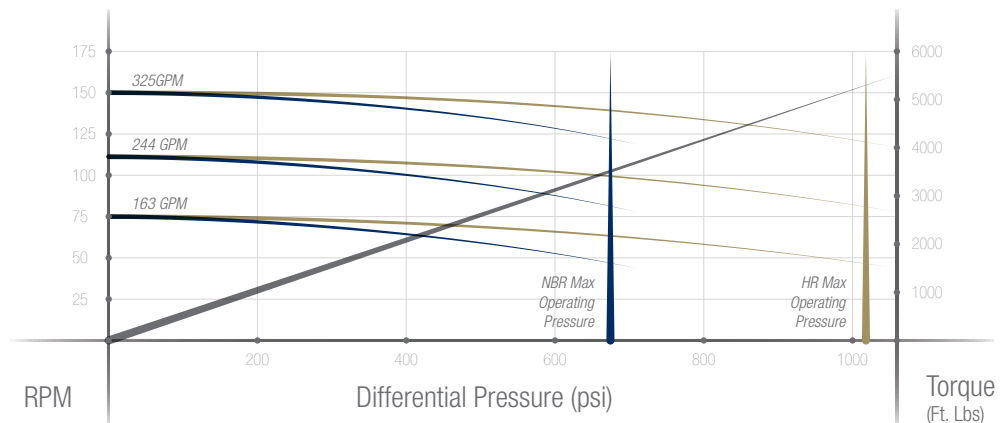

### Dimensional Data

### Continuous Maximum Rotary RPM

	Bit to Bend	Bit to Stabilizer	Overall Length	1.25° Bend	1.50° Bend	1.83° Bend	2.12° Bend	2.38° Bend
Straight	NA	25"	29 ft. 6 in	Straight Configuration: 80 RPM				
Fixed Bend	60"	25"	27 ft. 6 in	60	50	40	30	20
Adjustable	60"	25"	27 ft. 6 in	60	40	Not recommended	Not recommended	Not recommended

### Predicted Build Rates Degrees / 100 Ft.

Hole Size	Configuration	1.25° Bend	1.50° Bend	1.83° Bend	2.12° Bend	2.38° Bend
6" Hole	Slick	6.50	8.32	10.72	12.84	14.73
	Stabilized	8.02	9.63	11.75	13.62	15.29
6 1/8" Hole	Slick	6.06	7.88	10.29	12.40	14.29
	Stabilized	8.11	9.72	11.84	13.70	15.38
6 1/2" Hole	Slick	4.76	6.58	8.98	11.10	12.99
	Stabilized	8.36	9.97	12.09	13.96	15.63